



## Lorry Park, Kent

### PROJECT BACKGROUND & REQUIREMENT:



This park conducts customs and document checks on cross-channel lorries.

The external cabling and pipework acted as physical barriers, preventing wheelchair users from accessing the welfare cabins and offices.

A ramp was required to be placed over these obstacles.

### DESIGN PHASE:

Our in-house design team produced a detailed 3D model and 2D plan of the project. These were included with customer's quotation.

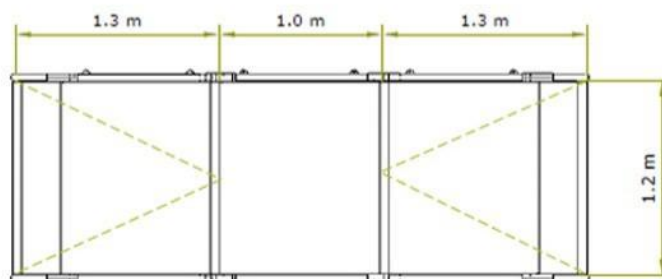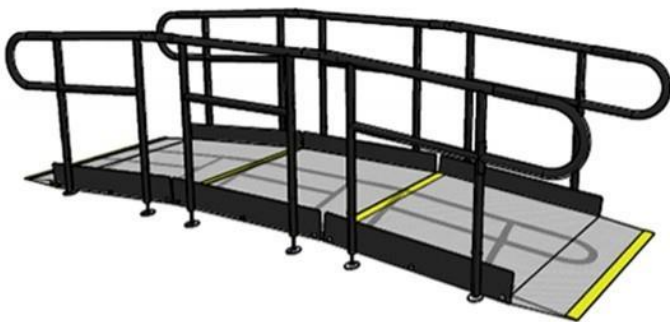

#### APPLICATION

Public Spaces

#### LOCATION

St Albans, Hertfordshire

#### SYSTEM

Temporary Modular Ramp

#### SERVICE PACKAGE

Hire

## INSTALLATION:

Once the pipes and cabling were in place, our temporary ramp was installed over them within an hour.

The ramp was designed with a 1:12 gradient to achieve the necessary height.

When no longer required, the ramp components will be dismantled and stored in our warehouse, ready for reuse on future ramp hire projects.

In contrast, concrete or timber steps are permanent solutions unsuitable for temporary use. Once removed, they are often discarded, making them less environmentally friendly and cost-effective.

## FEATURES INCLUDED:

- Looped Trombone Ends – Prevents clothes from snagging at the ends.
- Slip-Resistant Mesh Platform - A multi-directional walkway with self-draining steel mesh and a galvanised finish.
- Standard Colour: Black - Powder-coated black finish for greater durability than traditional paint.
- Adjustable Telescopic Legs - Adaptable to various threshold heights.
- Standard Handrail – Designed to be grasped for stability and support.



Do you require modular  
ramps and steps?

Request a quick price

EMAIL: [sales@rapidramp.co.uk](mailto:sales@rapidramp.co.uk)  
VISIT: [rapidramp.co.uk](http://rapidramp.co.uk)

HOURS: Open 8am - 5pm, Monday to Friday  
ADDRESS: Riverside Works, Church Ln, Etchingam, TN19 7AS